

HALF ELEVATION AT ABUTMENT


HALF ELEVATION AT PIER

PRESTRESSED CONCRETE BEAM NOTES

COMPRESSIVE STRENGTH
 The required compressive strength of the concrete is 6,300 p.s.i. at transfer of prestress and 9,000 p.s.i. at 28 days.


STRAND TYPE
 The required strand type is low-relaxation, Use strand having a nominal diameter of 0.6 with ultimate tensile strength of 270 k.s.i.
 LFD OPERATING RATING - HS 39.9
 The Operating Rating shown is based on a nominal strength using only strands that are bonded for the full length of the beam. All partially bonded strands are neglected in strength computations.

① Elastomeric Pad shall have a 50 durometer hardness and consist of a single layer 5/8" thick x 1'-4" wide x 3'-10" 1/2" long. The pad shall extend 1/2" beyond the end of the beam as shown.

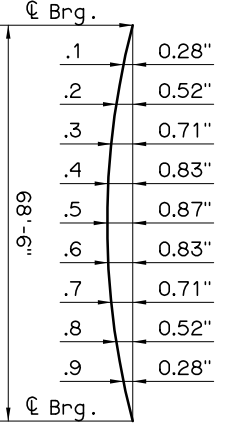


DEAD LOAD DEFLECTION DIAGRAM

NOTE:
 The Dead Load Deflection shown above at the tenth points are the initial deflections due to Deck Slab + Diaphragms + 5 p.s.f. Deck Form Allowance + Concrete Traffic Rail. It does not include the Beam weight or Future Wearing Surface.

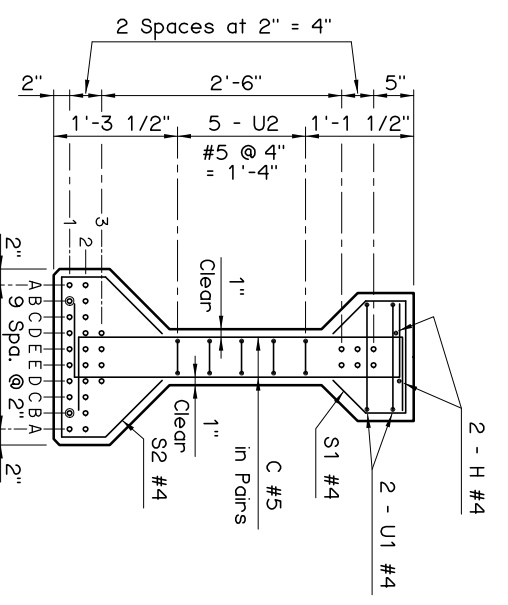

END SECTION

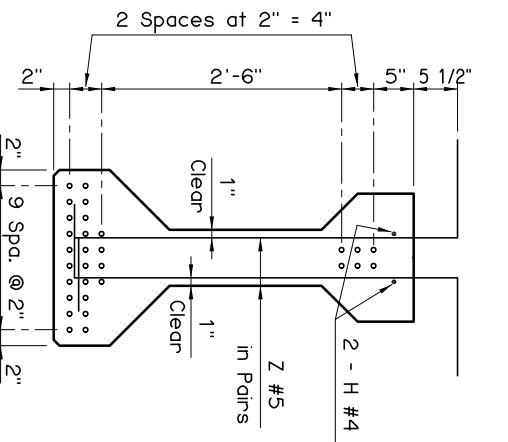

END SECTION

DEBOND SCHEDULE	
DEBOND PAIR	DEBOND LENGTH FROM END OF BEAM
B1	6'-0"

BEAM SECTIONS
 (30 - 0.6"Ø STRANDS)

Information shown on this sheet is applicable only to the standard bridge cross-section with 40' Clear Roadway, 8" Deck Slab and 4 Beams at 11'-4" spacing. Stay-in-Place Deck Forms are permitted if the conditions listed in the STAY-IN-PLACE DECK FORM NOTES on LONGITUDINAL SECTION sheet are satisfied. Any modification will require a custom design with an appropriate Dead Load Deflection Diagram.

APPROVED BY BRIDGE ENGINEER *Clark Head* DATE 12-1-04

OKLAHOMA DEPT. OF TRANSPORTATION
 BRIDGE STANDARD (ENGLISH)
 TYPE III P.C. BEAM DETAILS
 70' SPAN
 INTEGRAL