


INTENTIONALLY ROUGHENED SURFACE



EXAMPLES

Top surface of P.C. Beams shall be intentionally roughened to a minimum height of 1/4" over a maximum pitch of 2" measured longitudinally along the length of the beam. The crest and trough associated with the height shall not be less than 1/2" and shall extend the full width of the top flange. Roughened surface may be obtained by a special trowel as shown in the examples, by cleaning the concrete surface with a stiff wire brush (or blasting) to the extent that aggregate is exposed to a height of 1/4", or by another approved method. The method used shall be submitted for approval by the Engineer. Repair any damage to reinforcement epoxy coating before placement of deck concrete.

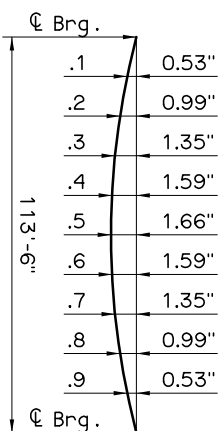


DEAD LOAD DEFLECTION DIAGRAM


NOTE:
The Dead Load Deflection shown above at the tenth points are the initial deflections due to Deck Slab + Diaphragms + 5 p.s.f. Deck Form Allowance + Concrete Traffic Rail. It does not include the Beam weight or Future Wearing Surface.

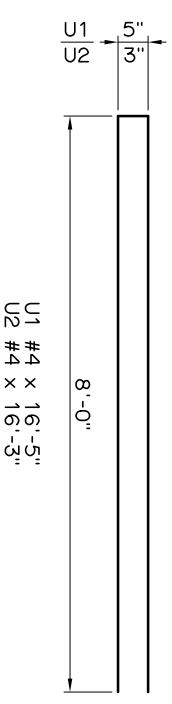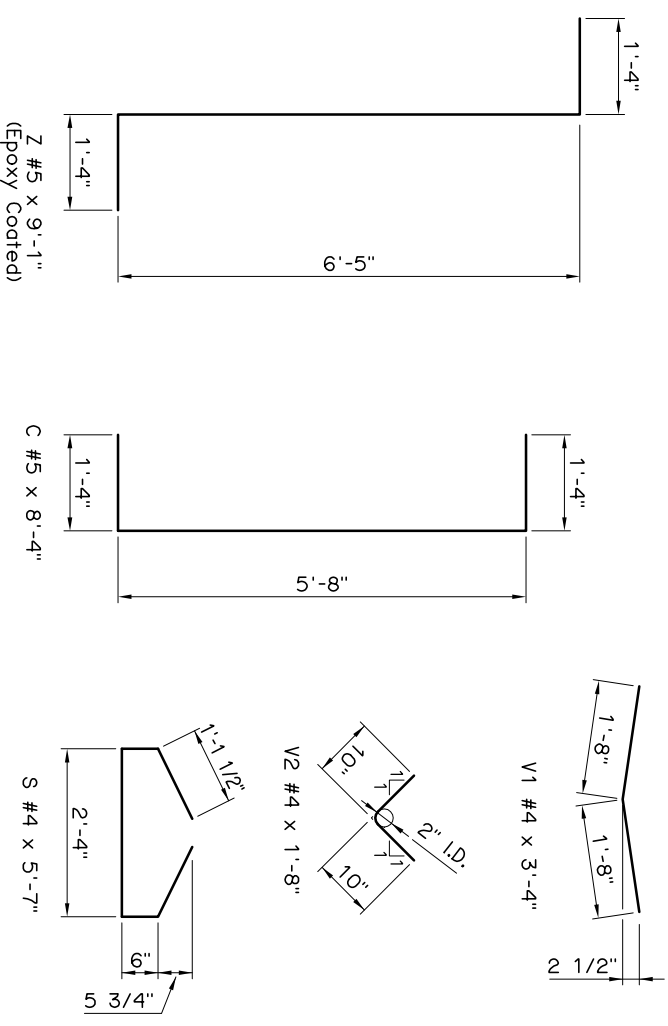

U1 #4 x 16'-5"
U2 #4 x 16'-3"

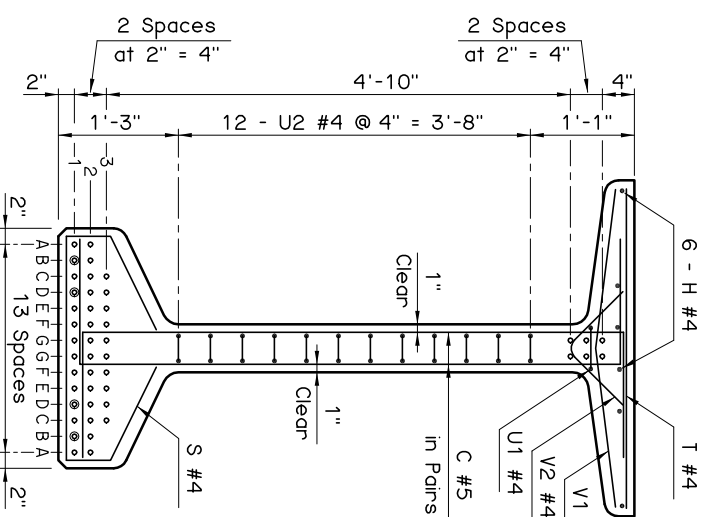


END SECTION

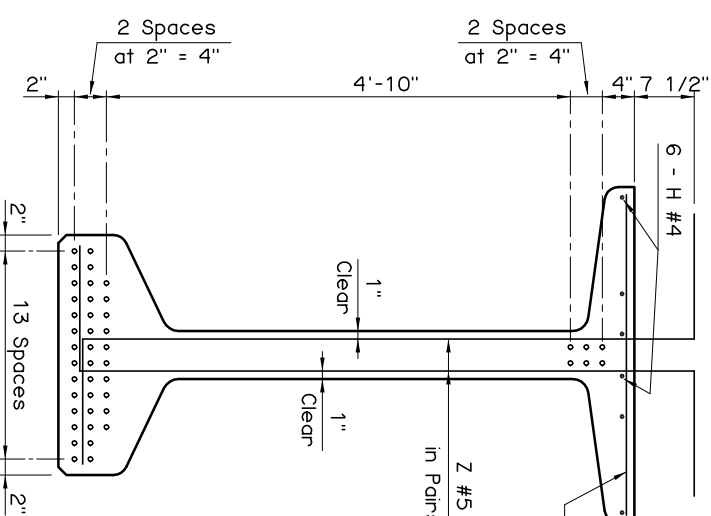

END SECTION

END VIEW

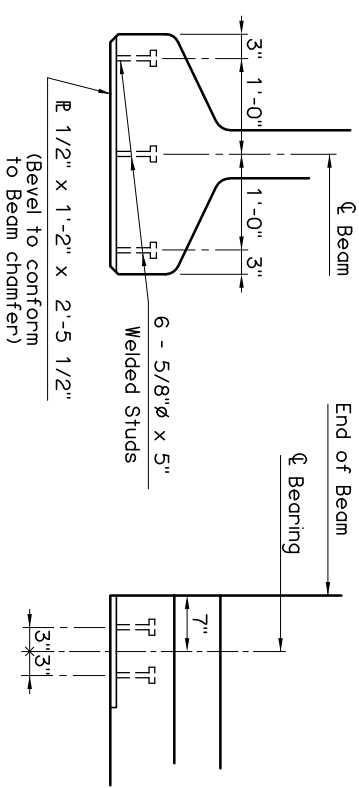

ENCASED SOLE PLATE DETAILS

NOTE:
Encased Sole Plate located at each end of Beam.

ELEVATION

DEBOND SCHEDULE	
DEBOND PAIR	DEBOND LENGTH FROM END OF BEAM
B1	14'-0"
D1	7'-0"

BEAM SECTIONS
(44 - 0.6"Ø STRANDS)

APPROVED BY BRIDGE ENGINEER *Chad Head* DATE *8/18/09*

OKLAHOMA DEPT. OF TRANSPORTATION
BRIDGE STANDARD (ENGLISH)
TYPE J P.C. BEAM DETAILS
115' SPAN
INTEGRAL (SHEET 2 OF 2)

1999 SPECIFICATIONS B40-I-PCB-J-115-2 OOE B-137E