
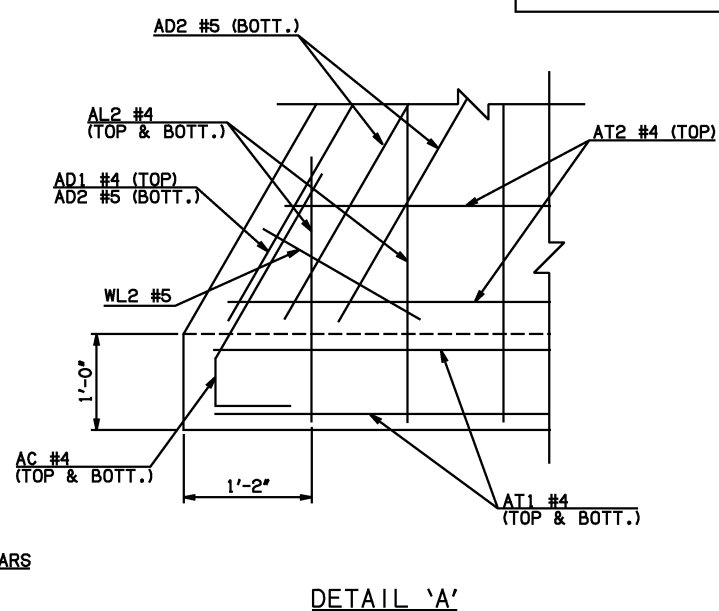
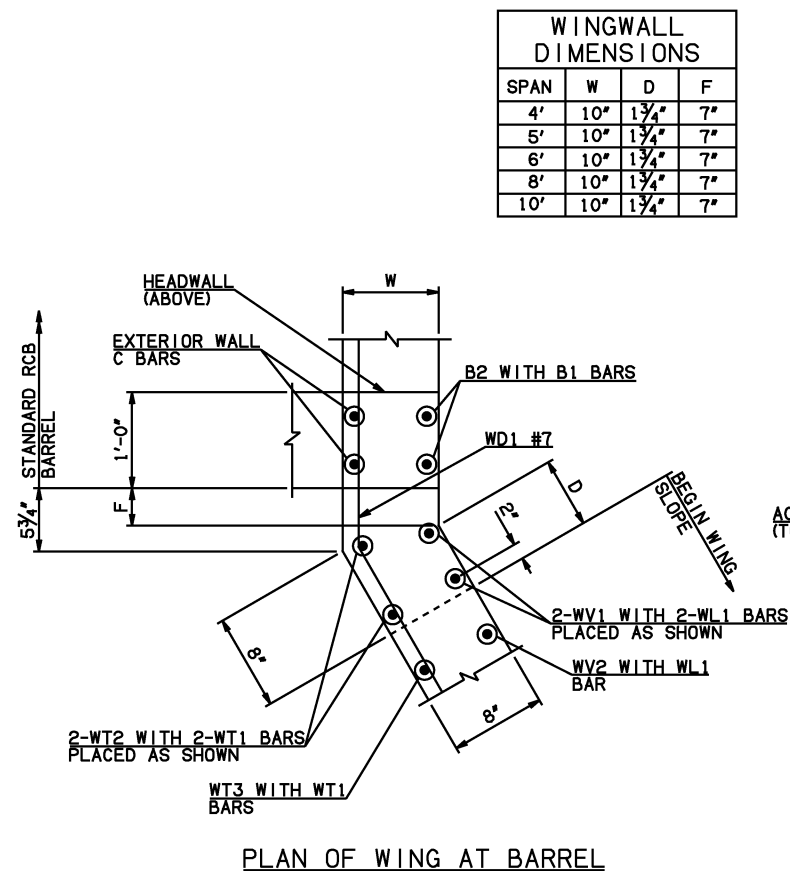


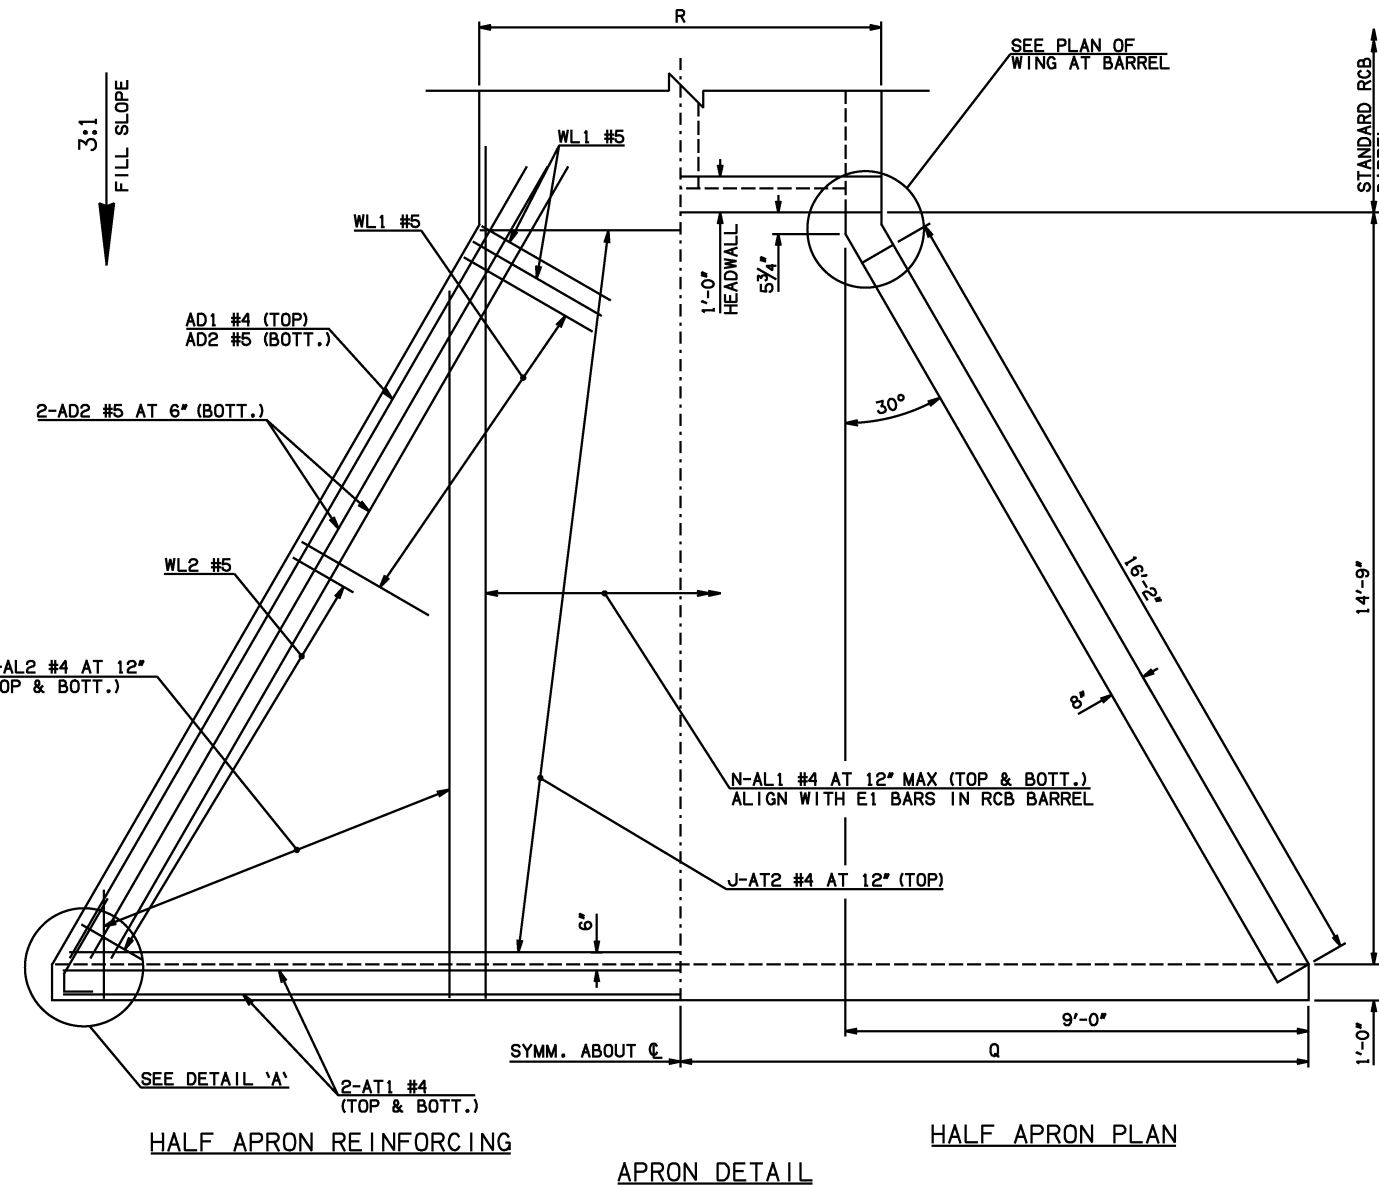

APRON AND HEADWALL BAR LIST																	
ONE APRON AND ONE HEADWALL SHOWN																	
MARK	SIZE	FORM	4' SPAN			5' SPAN			6' SPAN			8' SPAN			10' SPAN		
			QTY.	LENGTH	REMARKS	QTY.	LENGTH	REMARKS	QTY.	LENGTH	REMARKS	QTY.	LENGTH	REMARKS	QTY.	LENGTH	REMARKS
AC	#4	BNT	4	3'-8"		4	3'-8"		4	3'-8"		4	3'-8"		4	3'-8"	
AD1	#4	STR	2	18'-8"		2	18'-8"		2	18'-8"		2	18'-8"		2	18'-8"	
AD2	#5	STR	6	18'-8"		6	18'-8"		6	18'-8"		6	18'-8"		6	18'-8"	
AL1	#4	STR	28	17'-7"		32	17'-7"		36	17'-7"		44	17'-7"		52	17'-7"	
AL2	#4	STR	32	8'-6½" AVG.	2'-6" TO 14'-7"	32	8'-6½" AVG.	2'-6" TO 14'-7"	32	8'-6½" AVG.	2'-6" TO 14'-7"	32	8'-6½" AVG.	2'-6" TO 14'-7"	32	8'-6½" AVG.	2'-6" TO 14'-7"
AT1	#4	STR	4	26'-6"		4	28'-6"		4	30'-6"		4	34'-6"		4	38'-6"	
AT2	#4	STR	15	17'-11" AVG.	9'-10" TO 26'-0"	15	19'-11" AVG.	11'-10" TO 28'-0"	15	21'-11" AVG.	13'-10" TO 30'-0"	15	25'-11" AVG.	17'-10" TO 34'-0"	15	29'-11" AVG.	21'-10" TO 38'-0"
CH	#4	STR	4	10'-2"		4	12'-2"		4	14'-2"		4	18'-2"		4	22'-2"	
CL1	#4	BNT	14	4'-4"		16	4'-4"		18	4'-4"		22	4'-4"		26	4'-4"	
CL2	#4	BNT	14	4'-3"		16	4'-3"		18	4'-3"		22	4'-3"		26	4'-3"	

QUANTITIES						
ITEM	UNIT	4' SPAN	5' SPAN	6' SPAN	8' SPAN	10' SPAN
CLASS AA CONCRETE	CY	10.40	11.30	12.20	13.90	15.60
REINFORCING STEEL	LB	1850.00	1930.00	2020.00	2200.00	2400.00

NOTE: QUANTITIES ABOVE ARE FOR ONE END SECTION, WHICH IS COMPRISED OF ONE HEADWALL, ONE APRON, AND TWO WINGWALLS. INCLUDED IN REINFORCING STEEL PAY ITEM QUANTITY IS THE WEIGHT OF ADDITIONAL RCB BARREL REINFORCING STEEL REQUIRED AS SHOWN.

APPROVED BY BRIDGE ENGINEER *Scott A. Smith* DATE 4/2/10

OKLAHOMA DEPT. OF TRANSPORTATION
BRIDGE STANDARD (ENGLISH)
RCB CULVERTS - END SECTION DETAILS
DOUBLE CELL - 3'-0" HEIGHT - 0°
SHEET NO. 1 OF 2

2009 SPECIFICATIONSRCB-E2-H3-0-101EB-600E