


OKLAHOMA DEPARTMENT OF TRANSPORTATION

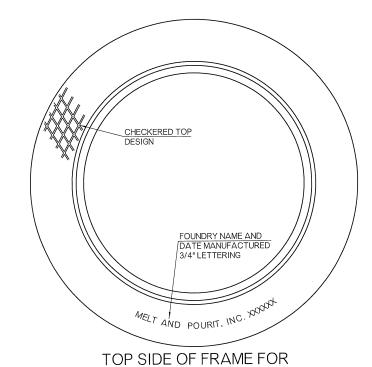




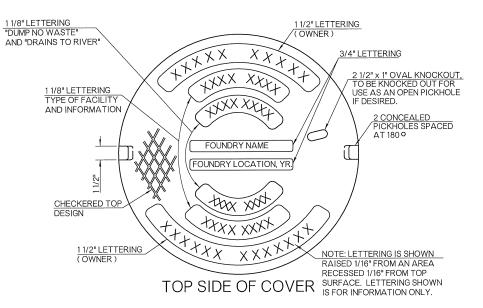


SECTION THRU COVER


xxxxxxx

3/4" LETTERING - MANUFACTURER'S PLANT NO., PART NO., & HEAT NO.



TOP SIDE OF COVER GRATE



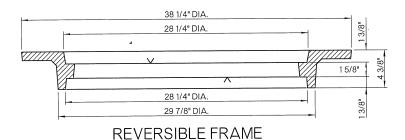

OUT OF PAVING INSTALLATION

SECTION THRU

## GENERAL NOTES

AT CENTER.

- ALL CONSTRUCTION AND MATERIAL REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE 2009 ODOT STANDARD SPECIFICATIONS.
- 2. COVERS WILL BE FURNISHED WITH A PLAIN SEAT, UNLESS A SELF-SEAL SEAT OR A LOCKING DEVICE IS SPECIFIED IN THE PLANS.
- 3. LETTERING TO DENOTE OWNERSHIP AND TYPE OF USAGE WILL BE AT THE DISCRETION OF THE OWNER.
- 4. FRAMES AND COVERS SHALL BE CAST STEEL, DUCTILE IRON, OR GRAY IRON CONFORMING TO SECTION 725 OF THE SPECIFICATIONS.
- 5. MANHOLE FRAMES, COVERS AND COVER GRATES INSTALLED DURING ORIGINAL CONSTRUCTION SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE OF THE ORIGINAL MANHOLE.

FOUNDRY NAME AND
DATE MANUFACTURED
1/2" LETTERING


TOP SIDE OF FRAME FOR IN PAVING INSTALLATION

++++ xxxx

PART NO., HEAT NO., AND PLANT NO. 1/2" LETTERING

7/32" SECTION THRU PICKHOLE

**OVAL KNOCKOUT** 





NOTE: MACHINING (  ${\sf SYMBOL} \ \land \ )$  MAY BE ACCOMPLISHED BY MILLING OR BY LEVEL GRINDING.

	BASIS OF PAYMENT		
	ITEM NO.	ITEM	UNIT
١	611 (C)	REPLACEMENT OF MANHOLE FRAME AND COVER	EΑ
ı	611 ( D )	REPLACEMENT MANHOLE FRAME	EΑ
ĺ	611 (E)	REPLACEMENT OF MANHOLE COVER	EΑ
ĺ	611 (F)	REPLACEMENT OF MANHOLE COVER GRATE	EA



MANHOLE FRAME AND COVER

ROADWAY DESIGN DIVISION STANDARD

OKLAHOMA DEPARTMENT OF TRANSPORTATION 2009 SPECIFICATIONS

MFC-4