

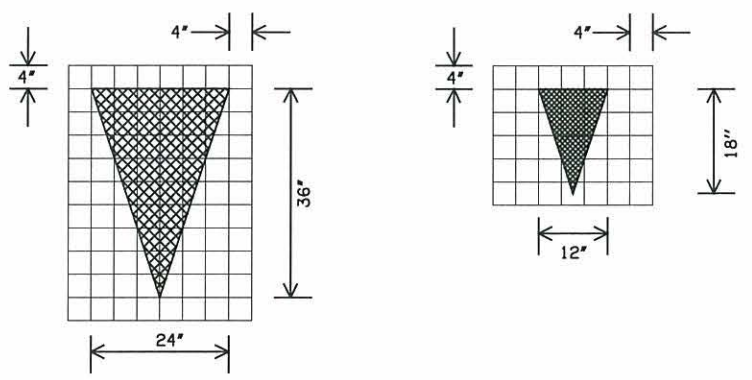
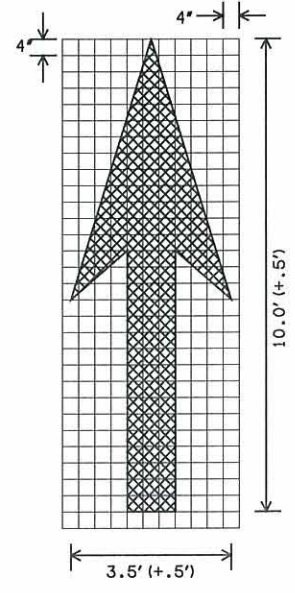
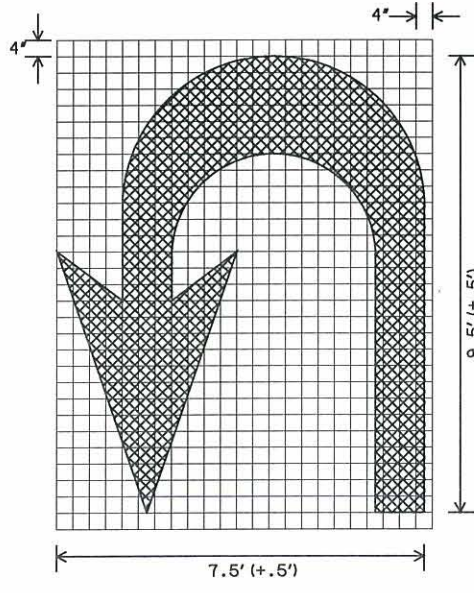
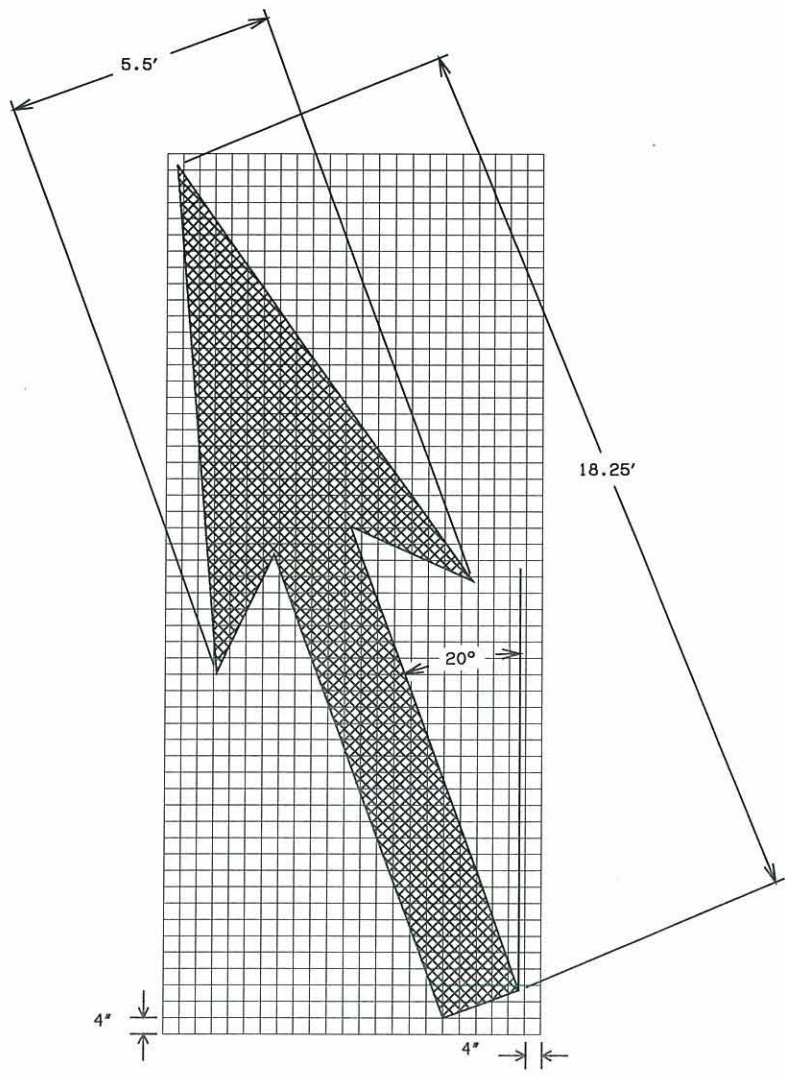
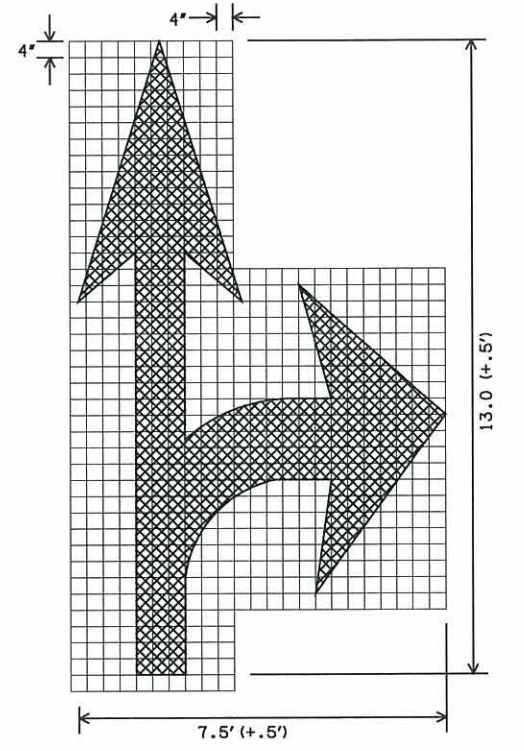
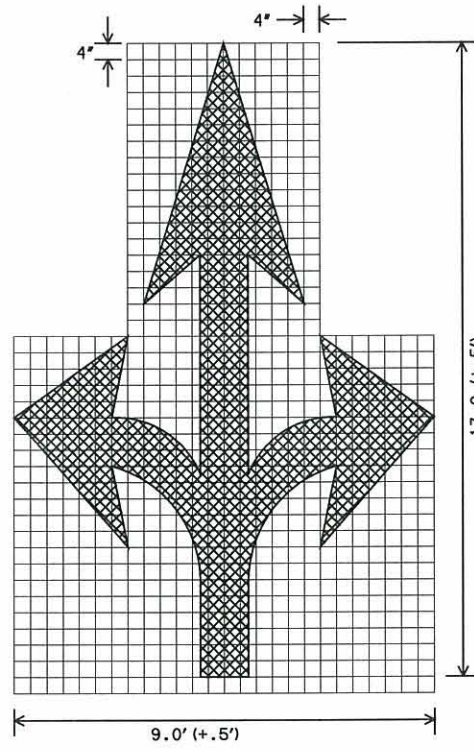
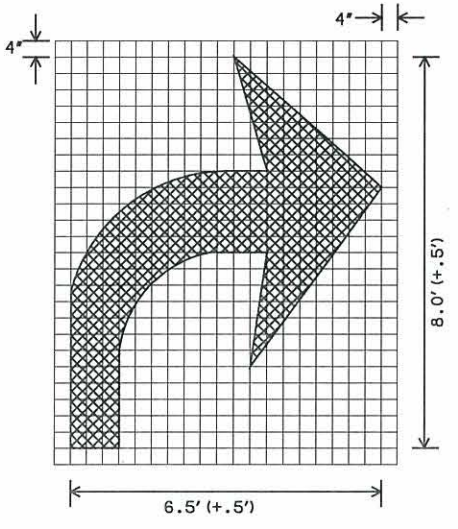


DESCRIPTION	REVISIONS	DATE
-------------	-----------	------

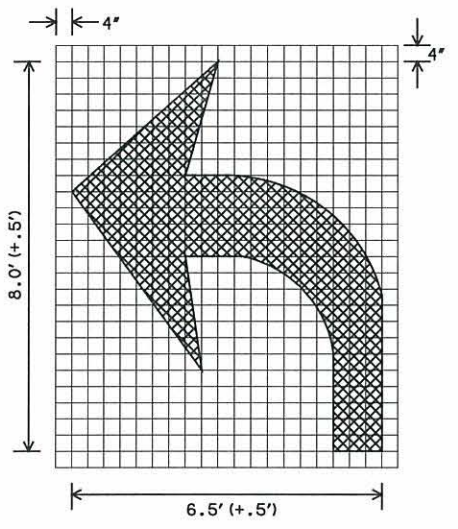


MAXIMUM YIELD LINE TRIANGLE MINIMUM YIELD LINE TRIANGLE

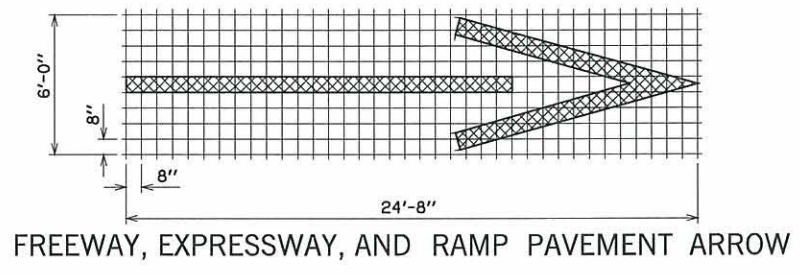

GENERAL NOTES

- PAVEMENT MARKINGS SHALL BE WHITE RETROREFLECTORIZED PLASTIC UNLESS OTHERWISE SPECIFIED. WHEN THE MESSAGE CONSISTS OF MORE THAN ONE WORD, IT SHOULD READ "UP" I.E. THE FIRST WORD SHOULD BE NEAREST THE DRIVER. THE SPACE BETWEEN LINES SHOULD BE AT LEAST FOUR TIMES THE HEIGHT OF THE CHARACTERS.
- ALL PAVEMENT MARKINGS SHALL CONFORM TO THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (LATEST REVISION).
- ALL DIMENSIONS ARE TYPICAL FOR SINGLE LANE UNLESS OTHERWISE NOTED.

BASIS OF PAYMENT		
ITEM NO.	ITEM	UNIT
854(B)	TRAFFIC STRIPE (PAINT) (ARROW, WORDS, OR SYMBOLS)	EA
855(B)	TRAFFIC STRIPE (PLASTIC) (ARROW)	EA
855(B)	TRAFFIC STRIPE (PLASTIC) (SYMBOLS)	EA
856(B)	TRAFFIC STRIPE (MULTI-POLYMER) (SYMBOLS, WORDS, ETC)	EA



APPROVED BY TRAFFIC ENGINEER *David Amah* DATE: 8/15/10

TRAFFIC STANDARD
PAVEMENT MARKING (ARROWS)