
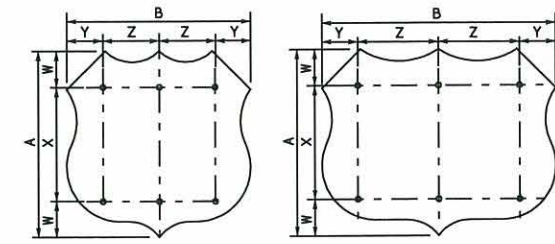


DESCRIPTION	REVISIONS	DATE
-------------	-----------	------

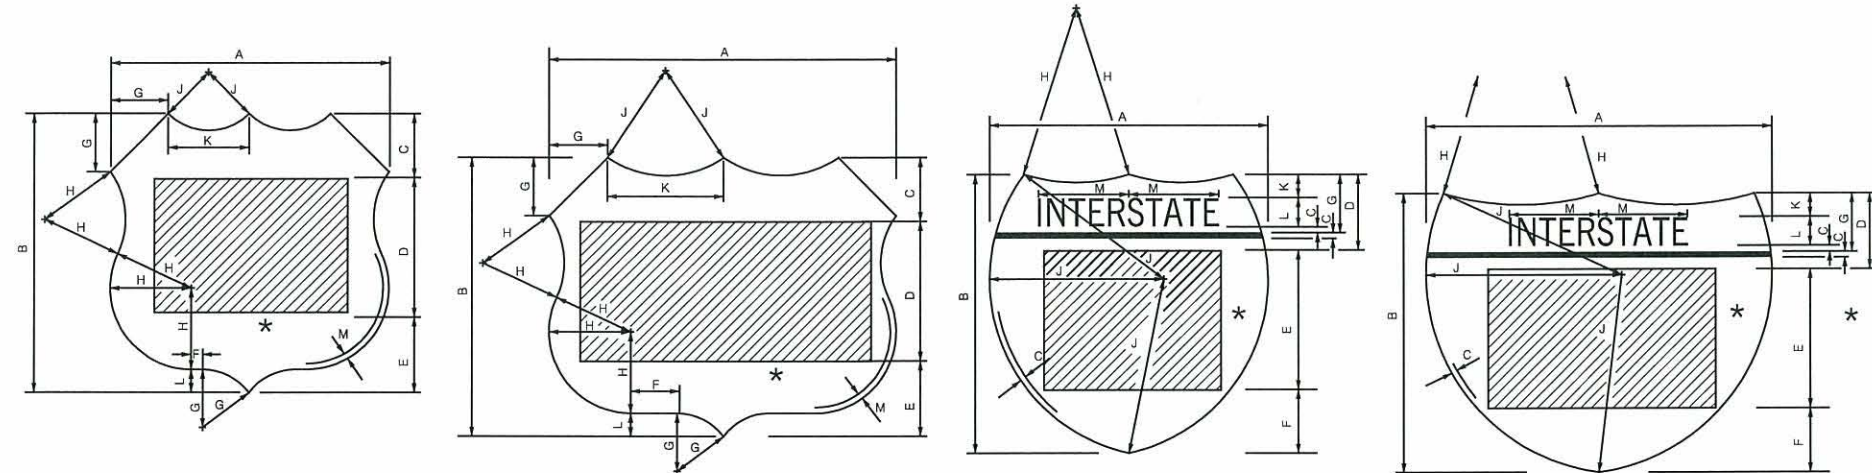


	24" X 24"	24" X 30"	36" X 36"	36" X 45"	48" X 48"	48" X 60"
A	24	24	36	36	48	48
B	24	30	36	45	48	60
W	4-1/2	4-1/2	7	7	9	9
X	15	15	22	22	30	30
Y	4-1/2	4-1/2	7	7	9	9
Z	7-1/2	10-1/2	11	15-1/2	15	21


SIGN DIMENSIONS (INCHES)											
	A	B	C	D	E	F	G	H	J	K	M
1 OR 2 DIGITS	24	24	5-1/2	12D	6-1/2	1	5	7	5	7	2 1/2
1 OR 2 DIGITS	36	36	8-1/4	18D	9-3/4	1-1/2	7-1/2	10-1/2	7-1/2	10-1/2	3 3/4
1 OR 2 DIGITS	48	48	11	24D	13	2	10	14	10	14	4 1
3 DIGITS	30	24	5-1/2	12D	6-1/2	4	5	7	9	10	2 1-2
3 DIGITS	45	36	8-1/4	18D	9-3/4	5-1/2	7-1/2	10-1/2	13-1/2	15	3 3/4
3 DIGITS	60	48	11	24D	13	8	10	14	18	20	4 1

SIGN DIMENSIONS (INCHES)											
	A	B	C	D	E	F	G	H	J	K	M
1 OR 2 DIGITS	24	24	1/2	6-1/2	12D	5-1/2	5	15	15	2	7-13/16
1 OR 2 DIGITS	36	36	3/4	9-3/4	18D	8-1/4	7-1/2	22-1/2	22-1/2	3	11-11/16
1 OR 2 DIGITS	48	48	1	13	24D	11	10	30	30	4	15-9/16
3 DIGITS	30	24	1/2	6-1/2	10D	7-1/2	5	24	17	2	7-13/16
3 DIGITS	45	36	3/4	9-3/4	16D	10-1/4	7-1/2	36	25-1/2	3	11-11/16
3 DIGITS	60	48	1	13	20D	15	10	48	34	4	15-9/16


* OPTICALLY SPACE NUMERALS ABOUT VERT. CENTERLINE.

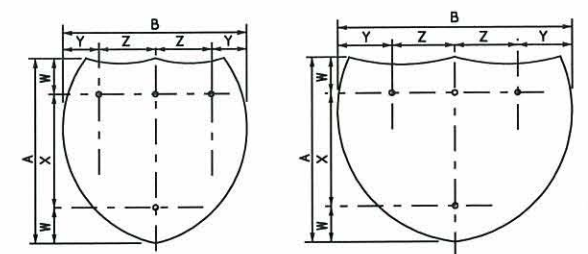


	24" X 24"	24" X 30"	36" X 36"	36" X 45"	48" X 48"	48" X 60"
A	24	24	36	36	48	48
B	24	30	36	45	48	60
W	4-1/2	4-1/2	7	7	9	9
X	15	15	22	22	30	30
Y	4-1/2	5	7	10-1/2	9	10
Z	7-1/2	10	11	12	15	20

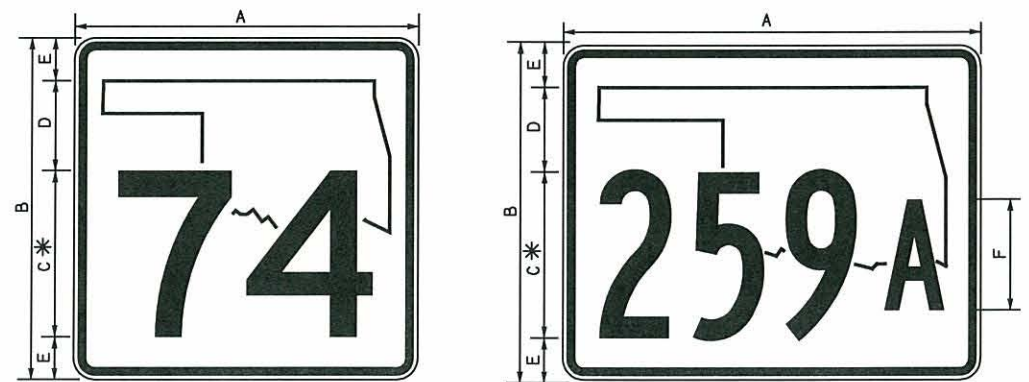

	1 & 2 DIGITS		3 DIGITS		3 DIGITS WITH A "LETTER"	
	12" NUMERALS	18" NUMERALS	12" NUMERALS	18" NUMERALS	12" NUMERALS	18" NUMERALS
A	24	36	30	45	30	45
B	24	36	24	36	24	36
C	12D	18D	12B	18B	12B	18B
D	6	12	6	12	6	12
E	3	3	3	3	3	3
F	-	-	-	-	8B	12B

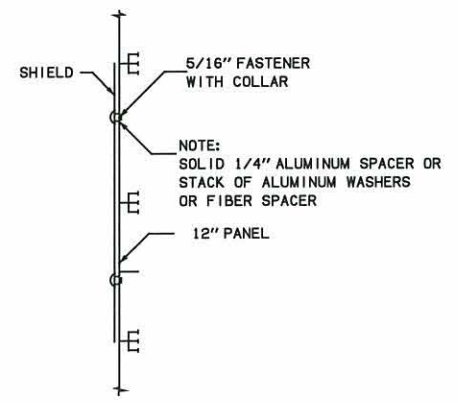

TYPICAL MOUNTING DETAIL

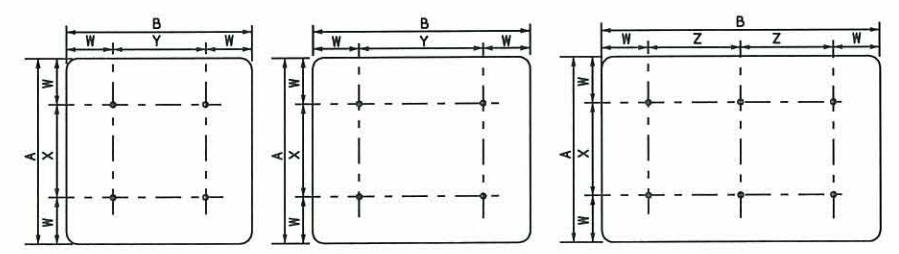

	24" X 24"	30" X 30"	36" X 36"	24" X 30"	30" X 36"	36" X 42"	24" X 38-1/4"	30" X 45"	36" X 54"	24" X 43-1/2"	30" X 54"	36" X 66"
A	24	30	36	24	30	36	24	30	36	24	30	36
B	24	30	36	30	36	42	38-1/4	45	54	43-1/2	54	66
W	6	7-1/2	9	6	7-1/2	9	6	7-1/2	9	6	7-1/2	9
X	12	15	18	12	15	18	12	15	18	12	15	18
Y	12	15	18	18	21	24	-	-	-	-	-	-
Z	-	-	-	-	-	-	13-1/8	15	18	15-3/4	19-1/2	24

GENERAL CONSTRUCTION NOTES:

INTERSTATE, U.S., AND STATE ROUTE SHIELDS FOR USE ON GUIDE SIGNS SHALL BE CUT FROM 0.063" THICK ALUMINUM OR 16 GAUGE GALVANIZED STEEL SHEET TO THE DIMENSIONS SHOWN WITH 3/8" DIAMETER MOUNTING HOLES PUNCHED OR DRILLED PRIOR TO APPLICATION OF REFLECTIVE SHEETING SIGN FACE.


REFLECTIVE SHEETING FOR SIGN FACES SHALL BE TYPE III (OKLAHOMA STANDARD SPECIFICATIONS).

U.S. AND STATE SHIELD FACES SHALL HAVE A WHITE REFLECTIVE BACKGROUND WITH BLACK SCREENED NUMERALS.

INTERSTATE ROUTE SHIELDS SHALL BE REFLECTIVE RED, WHITE, AND BLUE AS SPECIFIED IN THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (LATEST REVISION).

ALL PROCESS INKS USED FOR SCREENING FACES SHALL BE AS RECOMMENDED BY THE MANUFACTURER OF THE REFLECTIVE SHEETING.

ROUTE SHIELDS FOR GUIDE SIGNS SHALL BE PAID FOR IN PRICE BID FOR PANEL SIGNS UNLESS OTHERWISE NOTED IN PLANS.

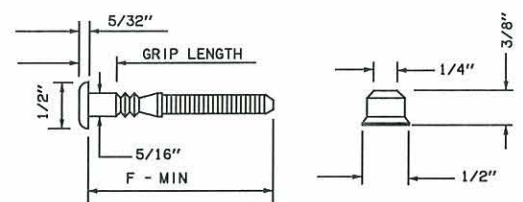


GRIP LENGTH = .422" - .515"
F - MIN = 2"

5/16" ALUMINUM, GALVANIZED STEEL, STAINLESS STEEL OR CADMIUM PLATED BOLTS WITH COMPATIBLE SELF-LOCKING STOP NUTS MAY BE USED.

5/16" FASTENER AND COLLAR (TYPICAL)

BASIS OF PAYMENT		
ITEM NO.	ITEM	UNIT
850(A)	SHEET ALUMINUM SIGNS	SF



APPROVED BY TRAFFIC ENGINEER: *Harold Smart* DATE: 8/5/10

TRAFFIC STANDARD
ROUTE MARKER SIGN DETAILS
(GUIDE SIGN)