




DESCRIPTION	REVISIONS	DATE
RE-ISSUE W/METRIC 1999 SPECS.		7/99
Amend Excel. Mat BOP Item No.	lgc 8/00	

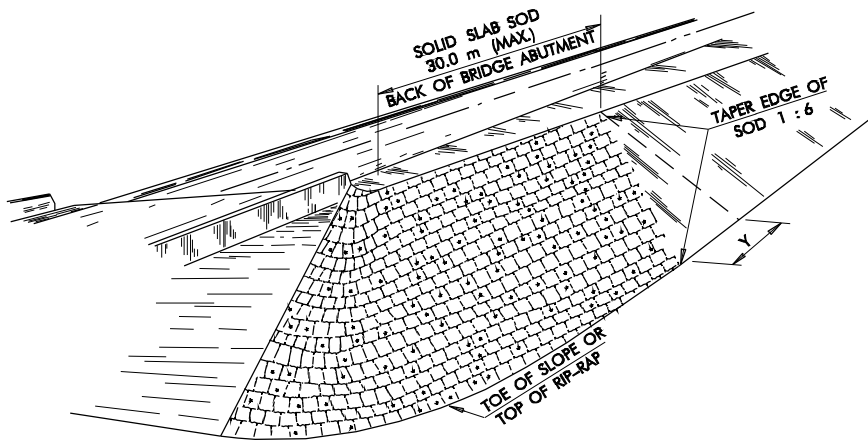


TYPICAL PLACEMENT OF SOLID SLAB SODDING ON FILL SLOPES, APPROACHES TO OVERPASSES AND BRIDGES.

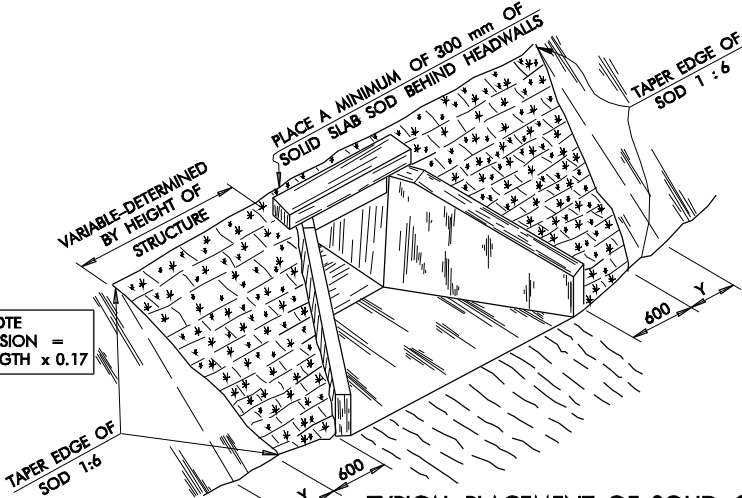

TYPICAL PLACEMENT OF SOLID SLAB SODDING AT STRUCTURE HEADWALLS

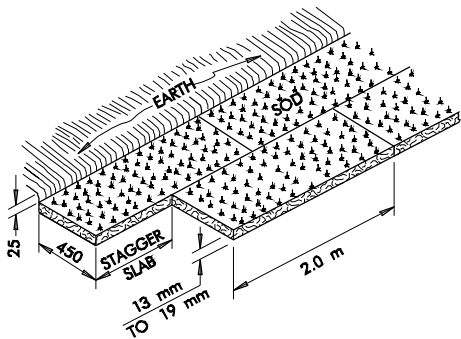


SOLID SLAB SOD (MARCH 1 THRU AUGUST 31)

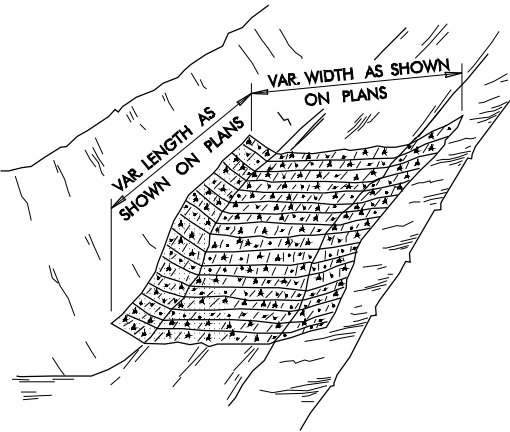


TYPICAL PLACEMENT OF SOLID SLAB SOD IN DITCHES


SOLID SLAB SODDING

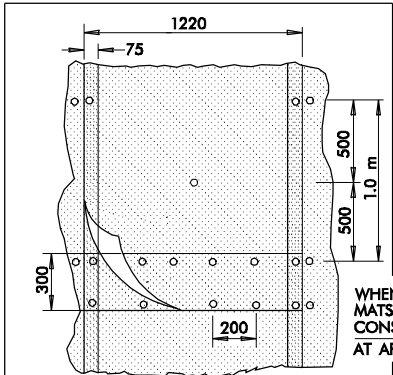


WHEN TWO LENGTHS OF EXCELSIOR MATS ARE TO BE JOINED TOGETHER CONSTRUCT A SPLICE JOINT AND STAPLE AT APPROX. 200 mm CENTERS.

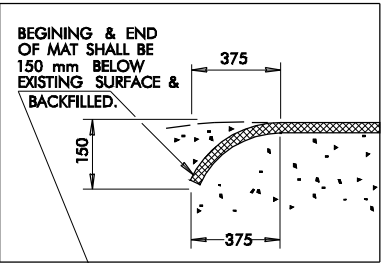

SPACE STAPLES 1.0 m (MAX.) AT CENTER OF EACH PANEL AND OFFSET 450 mm FROM STAPLES AT OUTER EDGES.
SPACE STAPLES 1.0 m (MAX.) ON OUTER HORIZONTAL EDGES OF EACH PANEL.

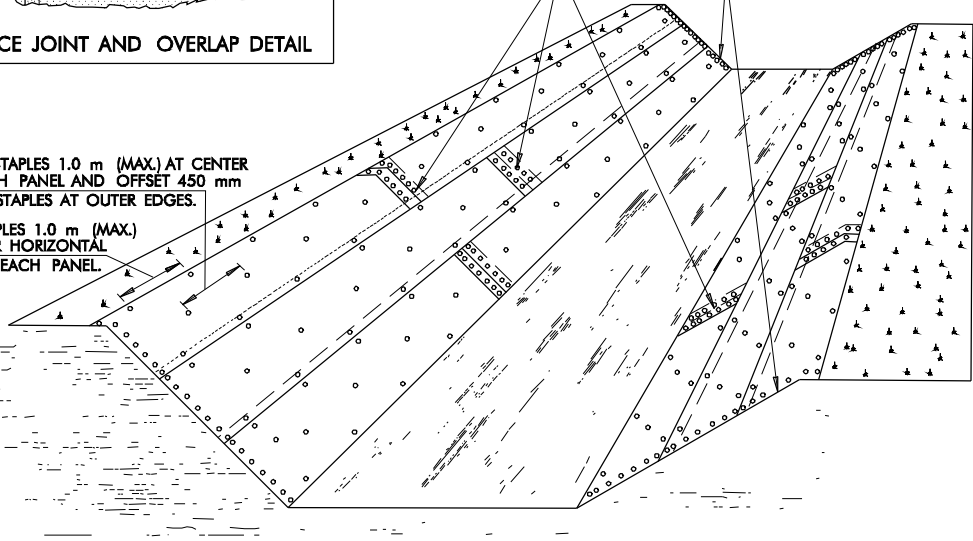

EXCELSIOR MAT CHANNEL PLACEMENT




SPACE STAPLES 1.0 m (MAX.) ON OUTER VERTICAL EDGES ON EACH PANEL.

SPACE STAPLES 1.0 m (MAX.) AT CENTER OF EACH PANEL & OFFSET 450 mm FROM STAPLES AT OUTER EDGES.

BOTTOM OF CUT OR FILL

OVERLAP MAT 75 mm

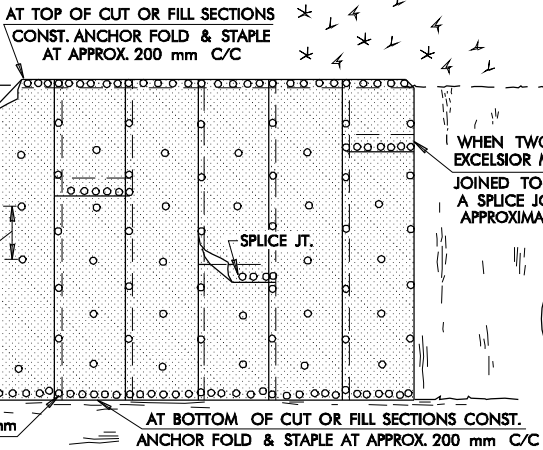

EXCELSIOR MAT BACKSLOPE AND FILLSLOPE PLACEMENT

- ### GENERAL NOTES
- ALL CONSTRUCTION AND MATERIAL REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE 1999 METRIC STANDARD SPECIFICATIONS.
 - SOLID SLAB SOD SHALL BE PLACED IN HORIZONTAL ROWS WITH THE LONGEST SIDE OF EACH SLAB RUNNING PARALLEL TO THE DIRECTION OF THE ROW AND THE SLABS IN ALTERNATE ROWS STAGGERED HALF THE LENGTH OF EACH INDIVIDUAL SLAB.
 - SLABS SHALL BE CUT AND HARVESTED WITH A COMMERCIAL SOD CUTTER TO THE DIMENSIONS SHOWN, THEN LOADED, TRANSPORTED AND HANDLED ON PALLETS.
 - AFTER PLACEMENT OF SOLID SLAB SOD, EARTH AT THE OUTER EDGES OF THE PLACEMENT SHALL BE BACKFILLED AND LOOSELY COMPACTED TO AT LEAST 25 mm ABOVE THE TOP OF THE SOLID SLAB SODDING.
 - SEE 1999 METRIC ROADWAY STANDARD ECM1-2 FOR ADDITIONAL DETAILS.

BASIS OF PAYMENT		
ITEM NO.	ITEM	UNIT
230.06(A)	SOLID SLAB SODDING	SQ. METER
233.06(E)	EXCELSIOR MAT	SQ. METER

APPROVED BY ROADWAY ENGINEER DATE

OKLAHOMA DEPT. OF TRANSPORTATION
ROADWAY STANDARD (METRIC)

EROSION CONTROL MATS

1999 SPECIFICATIONS	(SOD / EXCELSIOR)	ECM2-2	01M
ALL DIMENSIONS ON THIS SHEET IN MILLIMETERS UNLESS OTHERWISE NOTED.			R-128M